

Ductless Split Systems



FRIEDRICH

1 8 8 3

J Series

Single and multizone ductless line

Wall-mounted
Ceiling cassette
Concealed duct



The Next Generation of Ductless Split Systems

All of the advantages of ductless systems and Friedrich quality

ENERGY STAR® models

Friedrich offers a wide variety of ENERGY STAR® models in both single and multizone configurations with SEERS up to 25.0 and EERs up to 14.0.

Inverter variable capacity advantages

Inverter technology allows each system to adjust capacity and cooling output to provide only the amount of cooling needed at a given time. For example, an 18000 Btu system will operate even more efficiently at 15500 Btu or less if that's all that's needed, reducing energy consumption and improving comfort.

Optimized airflow

The indoor unit's 4-way air swing quickly disperses cool air to all four corners of the room to provide comfort throughout the room within a few minutes. The 'Surge Air' feature moves air at an even higher speed for rapid cooling.

Zero duct loss

The DOE reports that ducted systems lose an average of 25-40% in performance due to leaks, cracks or disconnections in ductwork.

No ductwork means that ductless systems do not experience duct loss, saving energy and money.


No dirty air ducts*

Now there's no need to clean dirty air ducts that can harbor dust, germs and allergens that are eventually blown into your home or office.

Zone cooling flexibility

Independently condition up to (8) separate zones using only a single outdoor unit. Achieve the ultimate in comfort and energy control by cooling or heating only the zones that are in use. And, because each zone is independent of the others, comfort settings can vary.


DIAMONGOLD
Advanced Corrosion Protection™



Protects the outdoor coil against deterioration and extends the life of the unit especially in harsh coastal environments.



Model MWH12Y3J



*Ductless wall-mounted and ceiling cassette models

Friedrich has over 1,000 multizone configurations utilizing wall-mounted, ceiling cassette and concealed duct models



Enjoy the flexibility to mix and match systems to fit your application.

Zone cooling and heating provides unmatched customized comfort and energy savings

Occupants have the ability to set the temperature of each zone to their preferred comfort level*, or even turn off units in unoccupied rooms, without affecting other zones.

That's the beauty and efficiency of a Friedrich multizone system.



*Multizone units cannot heat and cool simultaneously.

The Advantages of Friedrich's Precision Inverter System

Single or multizone, Friedrich ductless is superior to conventional systems

Precision Inverter technology varies the compressor, the outdoor and the indoor fan speeds, eliminating constant compressor start-ups/shut-downs that traditional systems require to maintain the set temperature.

This is especially beneficial in multizone systems where room temperature set points vary and some indoor units may be turned off in unoccupied rooms.

Each system can adjust capacity and cooling output to provide only the amount of cooling needed at a given time. The result is optimal comfort with low energy costs.

TRADITIONAL SYSTEM	INVERTER SYSTEM
At initial start up, a fixed capacity system slowly reaches the set temperature.	At initial start up, utilizes variable capacity to quickly reach the set temperature.
Complete shutdown once set temperature is achieved.	Reduces capacity as set temperature is achieved.
Temperature within the space rises until 2nd system start up.	Variable capacity maintains set temperature keeping space comfortable with reduced energy consumption.
System works at full capacity to again reach set temperature.	
System cycles on and off continually to maintain the set temperature.	

The twin-rotary compressor and inverter drive provide superior performance for perfect comfort and optimized energy efficiency.

Friedrich J Series ductless utilizes an inverter drive coupled with variable speed, twin rotary compressors for optimal performance and increased energy efficiency.




FEATURE	ADVANTAGE	BENEFIT
Inverter Drive	Accelerated cooling and heating performance	Temperature set-point is reached faster
Variable Speed Compressor	Smooth, modulated frequency for temperature maintenance	Comfortable indoor climate maintained consistently. Load matching comfort
Inverter Ramping Start-up	Low rotation speed at start-up keeping power current minimal	Eliminates power spikes that can affect appliances and cause energy spikes
Inverter Long, Slow Run	No compressor start/stop like conventional systems	Energy used more effectively and system can last longer
Twin-Rotary Compressor	BLDC Motor, Light weight, compact design, 30~120 Hz	Highly efficient, low noise, lowest vibration

No other system matches the efficiency and performance of Friedrich's Precision Inverter


CONVENTIONAL SYSTEMS

Run at a single capacity, turning on and off to reach the desired set point. This means they run at full speed each time, resulting in high energy consumption.

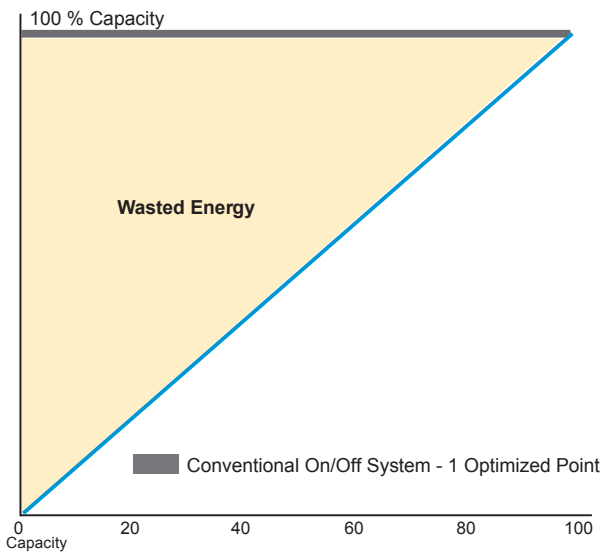


TWO-STAGE AIR CONDITIONERS

Won't significantly reduce your energy use. These units only run at 2 speeds, 50% and 100%, also resulting in high energy consumption.

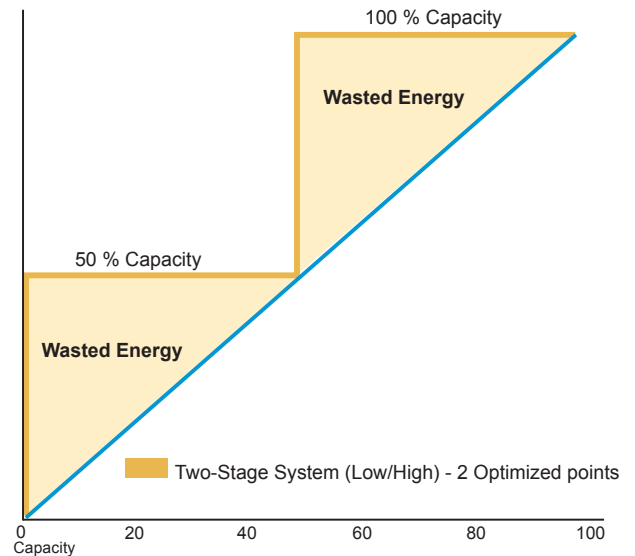


TYPICAL INVERTER SYSTEMS

Make changes in **7 Hz increments** allowing the unit to run at variable speeds, delivering a more precise heating-cooling solution.

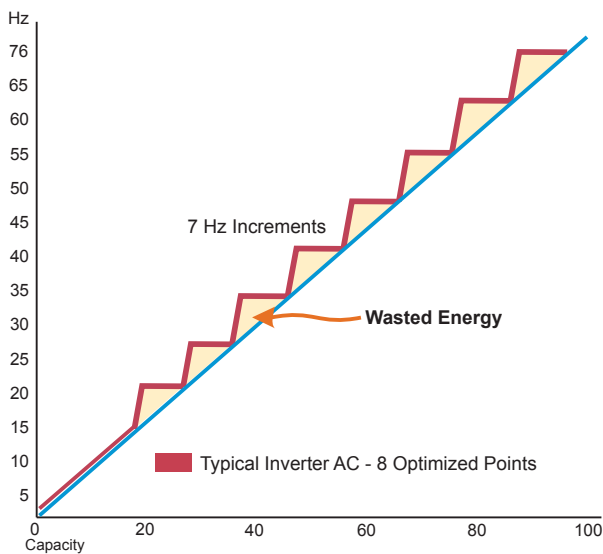

FRIEDRICH PRECISION INVERTER SYSTEMS

Make changes in **1 Hz increments** allowing the unit to run at variable speeds, delivering the most precise heating-cooling solution.

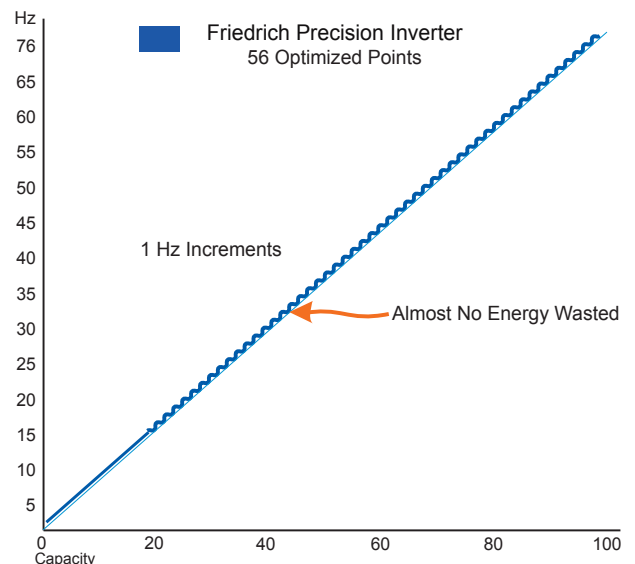

Attractive and high efficiency options for cooling and heating residential and light commercial spaces.

Wall-mounted models mount high on an exterior wall.

The attractive, neutral finish blends well with just about any decor.

The units can be used individually or as part of a multizone system to condition multiple spaces or a large area.





Residential Applications

- Room additions/renovations
- Homes without ductwork
- Bedrooms and family rooms
- Garage workshops
- Sunrooms
- Guest quarters



Commercial Applications

- Hotels and other lodging
- Computer rooms and server rooms
- Restaurant kitchen and prep areas
- Offices in warehouse spaces
- Storage facilities
- Buildings where security concerns prevent the use of window units
- Internal areas without exterior wall access

Features you'll find with Friedrich Ductless Systems:

System Type	Wall-mounted Single Zone	Wall-mounted Multizone	Cassette Single Zone	Cassette Multizone	Concealed Duct Single Zone	Concealed Duct Multizone
Installation	Wall	Wall	Ceiling	Ceiling	Ceiling	Ceiling
Cool only	Y	N	N	N	N	N
Heat pump	Y	Y	Y	Y	Y	Y
115 volt models	Y	N	N	N	N	N
Inverter driven compressor	Y	Y	Y	Y	Y	Y
SEER	Up to 25.0	Up to 21.7	Up to 19	Up to 16.5	Up to 17.6	Up to 16.5
Auto changeover	Y	N	Y	N	Y	N
Low ambient cooling operation	14° F	14° F	5° F	5° F	5° F	5° F
24- Hr. Programmable timer	Y	Y	Y	Y	N	N
Remote control	Y	Y	Y	Y	N	N
Wall controller option	Y	Y	Y	Y	Y	Y
7-Day Programmability (with wall control)	Y	Y	Y	Y	Y	Y
Auto restart	Y	Y	Y	Y	Y	Y
Surge cool/heat	Y	Y	Y	Y	N	N
Dry mode	Y	Y	Y	Y	Y	Y
Auto Clean	Y	Y	N	N	N	N
DiamonGold Advanced Corrosion Protection™	Y	Y	Y	Y	Y	Y
4-way auto swing	Y	Y	Y	Y	N	N
Washable, antimicrobial air filters	Y	Y	Y	Y	Y	Y
Auto shut flaps when unit is off	Y	Y	Y	Y	N	N
Louver Position Steps (Fan/Cool/Heat)	6 / 6 / 6	6 / 6 / 6	4 / 5 / 4	4 / 5 / 4	N	N

Auto clean

Indoor blower runs to remove dust, dirt and moisture from the coil after system is shutdown.

Surge cool/heat

Allows quick cooling/heating. In this mode the unit will operate at 100% for 30 minutes to cool/heat the room rapidly.

Built-in low ambient standard

Allows wall-mounted unit's operation down to 14°F in cooling mode. Down to 5° F in concealed duct and cassette models.

Auto changeover (Single zone only)

Automatically changes over from cool to heat and heat to cool to maintain the set temperature.

Auto restart

Auto restart function allows system to resume with previous settings in the event of a power shutdown. (Power supply must be restored).

Dry mode

Reduces the humidity when cooling needs are low.

4-way auto swing

Louvers will automatically move up/down and left / right to maintain a uniform room temperature.

DiamonGold Advanced Corrosion Protection™

Protects the outdoor coil against deterioration and extends the life of the unit especially in harsh coastal environments.

The indoor cross-flow fan and a low vibration compressor provide ultra quiet operation indoors and outdoors.

Ultra quiet cross-flow fan


An electronically controlled cross-flow fan creates an ultra quiet, yet powerful air flow into the room.

Low vibration, twin-rotary compressor

Friedrich's twin-rotary compressor has a unique design that reduces vibration for lower sound levels outdoors.

BLDC fan motor

Brushless, digitally commutated motor with accurate speed control that makes the electrical and mechanical operation smoother, more reliable and more efficient.

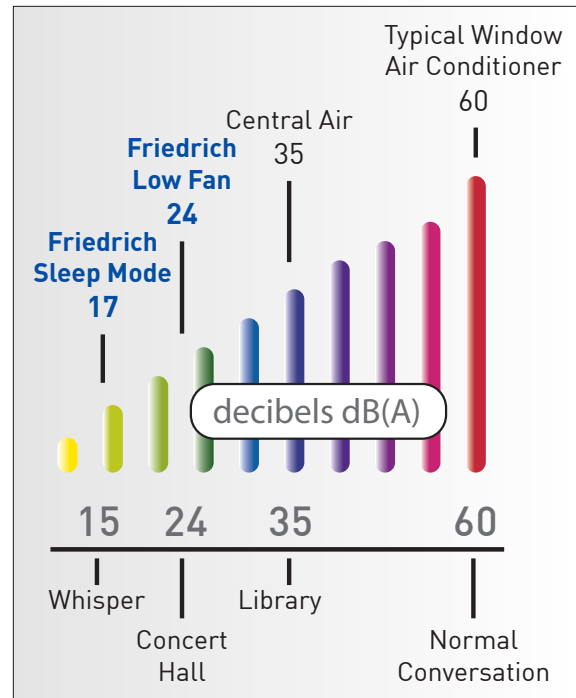



Powerful airflow for faster heating and cooling.

Optimum air flow

Air is directed downward in heating mode and angled upward during cooling mode so the room feels more comfortable, faster.

Large fans

Powerful fans move the air across the room- up to 39 feet away. That means faster cooling and heating and you feel comfortable sooner no matter where you are in the room.

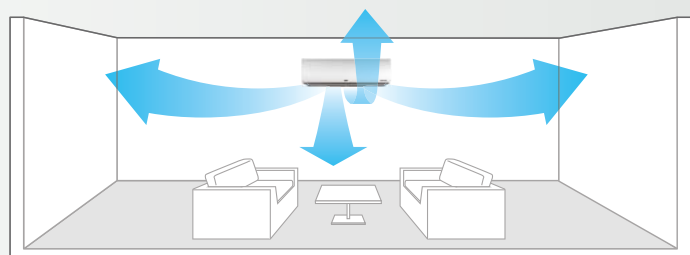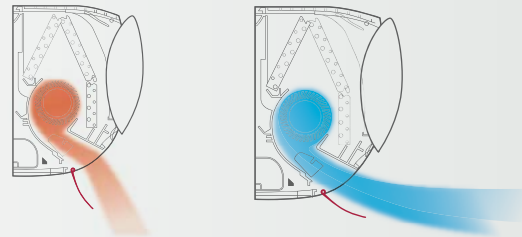

The Next Generation of Ductless Split Systems

Convenient installation features that will get your ductless running in no time.



UNIQUE MOUNTING BRACKET

16" On-Center

The hanging bracket comes with a set of holes that are placed 16" apart from each other to help you attach the bracket securely to "16 on center" wall studs.

Level-Line Ledges

Incorporated "Level-Line Ledges" ensure a straight wall mount and frees both hands for an easy single-person installation.


Tape Measure Assist

The integrated "blade grip" securely keeps measuring tape in place. The "blade grip" gives you a helping hand when installing the bracket to the wall.



Wall Stand-off Bracket

The clip keeps sufficient space between the unit and the wall creating more room for installation.



Spacious Tubing Area

Ample space was created to facilitate tubing installation and placement.

Low Installation Access Panel

By lowering the access panel to eye-level we have created a hassle-free access to electrical connections.



Secure Grip Screws*

"Grip Screws" firmly secure wall-mounted unit to wall bracket providing a stable setup.

* Not available on MW30Y3J and MW36Y3J.

OPTIONAL ACCESSORIES

Refrigeration Line Sets

USED WITH	Length Ft.	Liquid	Suction	Kit#
9000 and 12000 Btu indoor units	15'	1/4"	3/8"	T32150
	35'	1/4"	3/8"	T32350
18000 Btu indoor units	15'	1/4"	1/2"	T42150
	35'	1/4"	1/2"	T42350
24000, 30000 and 36000 Btu indoor units	15'	3/8"	5/8"	T53150
	35'	3/8"	5/8"	T53350

Low Ambient Wind Baffle Kit

Wind baffle allows operation down to 0 °FWB.
(Available for Wall-Mounted Single Zone)

WIND BAFFLE	USED WITH
DLAWB1	9000 - 12000 Btu wall-mounted single zone models
DLAWB2	18000 - 36000 Btu wall-mounted single zone models

Thermostat

DWC1-Wired, 7-day fully programmable wall thermostat.
(Available for all models)

Ceiling Cassette Grilles (Required accessory)

Required decorative grille for ceiling cassette models

DECORATIVE GRILLE	USED WITH
DCG1218	MC12Y3JM, MC18Y3JM - 12000 and 18000 Btu models
DCG2436	MC24Y3J, MC36Y3J- 24000 and 36000 Btu models



Friedrich's Ductless Split systems are compatible with aftermarket drain pumps and condensate sensors.

For more information visit the following sites:

Condensate Pumps

Rectorseal/Aspen Pumps: <http://airtec.rectorseal.com/pumpselector>.

Condensate Sensors

Rectorseal, Safe-T-Switch® www.rectorseal.com

Aqua guard: www.rctus.com/product

Adapter

Adapter is available through Friedrich parts distributors.

All R410A models have 1/2"-20 UNF (5/16" SAE) X 1/4" SAE thread per inch charging and vacuuming ports.

An adapter must be used for 1/4" gauges.

COOL ONLY

Single Zone WALL-MOUNTED

9000-24000 Btu. Cool only models with features for convenient operation, care-free comfort and years of dependability.

Features

- Inverter technology (variable speed compressor)
- BLDC motors
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Fan mode
- Surge cool
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Built-in low ambient standard, down to 14°F (Cooling Mode)
- 24-hour on/off timer
- Wall stand-off bracket



MW09C1J, MW12C1J



MW18C3J, MW24C3J



WIRELESS
REMOTE CONTROL

*Models M18CJ, M24CJ and components MW18C3J, MR18C3J, MW24C3J and MR24C3J are not available for sale in AZ, CA, NM or NV.



MR09C1J, MR12C1J



MR18C3J



MR24C3J



SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Cool Only			
		9k	12k	18k	24k
SYSTEM MODEL NO.		M09CJ	M12CJ	M18CJ*	M24CJ*
INDOOR MODEL		MW09C1J	MW12C1J	MW18C3J*	MW24C3J*
OUTDOOR MODEL		MR09C1J	MR12C1J	MR18C3J*	MR24C3J*
SPECIFICATIONS					
CAPACITY COOLING (RATED)	Btu	9,000	10,600	17,000	22,000
CAPACITY COOLING (MIN-MAX)	Btu	3,070-12,120	3,070-13,660	3,070-20,470	3,070-26,270
COOLING AMPS		6	8.4	7	8.7
SENSIBLE HEAT RATIO		.71	.71	.72	.72
SEER		21.5	21.5	18.0	20.0
EER		13.3	12.5	12.0	10.8
ENERGY STAR		YES	YES	NO	NO
MOISTURE REMOVAL	Pts/h	2.3	3.0	4.2	5.5
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	124/212/272/335	124/212/272/335	300/371/441/512	300/389/512/680
SOUND RATING - INDOOR	dB-A	19 / 24 / 33 / 38	19 / 24 / 33 / 39	29 / 35 / 40 / 45	29 / 35 / 40 / 46
SOUND RATING - OUTDOOR	dB-A	45	45	53	54
OPERATING RANGE (0°F WITH WIND BAFFLE)	°FDB	14(0)-118	14(0)-118	14(0)-118	14(0)-118
EST. YEARLY OPERATING COST	\$	61	81	127	183
ELECTRICAL DATA					
POWER SOURCE	V	115/60/1	115/60/1	208/230/60/1	208/230/60/1
MINIMUM AMPACITY	A	12	12	19	19
COOLING WATTS	W	677	896	1416	2037
MAX. TD FUSE/BREAKER	A	20	20	25	25
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14	4 x 14	4 x 14
REFRIGERATION SYSTEM					
REFRIGERANT		R410A	R410A	R410A	R410A
COMPRESSOR TYPE		Single Rotary	Single Rotary	Twin Rotary	Twin Rotary
CONNECTIONS		Flare	Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4	3/8
SUCTION LINE O.D.	in	3/8	3/8	1/2	5/8
FACTORY PRECHARGE	ft	41	41	25	25
REFRIGERANT CHARGE	oz	36	36	48	64
MIN./MAX. LINE LENGTH	ft	7-66	7-66	10-66	10-98
MAX. HEIGHT DIFFERENCE	ft	33	33	33	49
DIMENSIONS & WEIGHT					
INDOOR UNIT					
W X H X D	in	35-1/4x 11-1/4x 8-5/16		40-5/8x 12-7/8x 9-5/8	40-5/8x 12-7/8x 9-5/8
NET WEIGHT	lbs	23	23	32	32
SHIPPING WEIGHT	lbs	27	27	40	40
OUTDOOR UNIT					
W X H X D	in	30-5/16x 21-5/16x 11-5/16		34-5/16x25-7/8x12-5/8	34-5/16 x31-1/2 x12-5/8
NET WEIGHT	lbs	78	78	97	122
SHIPPING WEIGHT	lbs	79	79	101	130
TOTAL NET WEIGHT	lbs	101	101	129	155
TOTAL SHIPPING WEIGHT	lbs	106	106	169	196

*Models M18CJ, M24CJ and components MW18C3J, MR18C3J, MW24C3J and MR24C3J are not available for sale in AZ, CA, NM or NV. Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Single Zone 25.0 SEER WALL-MOUNTED

12000 Btu. Our most efficient unit ever! Features for comfort and convenience year 'round. In heating mode, unit efficiently heats by using approximately 1/4 of the energy required by electric heat.

Features

- Inverter technology (variable speed compressor)
- BLDC motor
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan/Auto mode
- Surge Cool/Heat
- Natural air flow
- Ultra quiet operation
- Sleep mode
- Auto restart
- Auto changeover
- Low ambient operation down to 14°F (Cooling Mode)
- 24-hour on/off timer
- ENERGY STAR® qualified model
- Hidden display (only visible during operation)



MWH12Y3J



WIRELESS
REMOTE CONTROL



MRH12Y3J



SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Heat Pump
		12k
SYSTEM MODEL NO.		HM12YJ
INDOOR MODEL		MWH12Y3J
OUTDOOR MODEL		MRH12Y3J
SPECIFICATIONS		
CAPACITY COOLING (RATED)	Btu	12,000
CAPACITY COOLING (MIN-MAX)	Btu	3070~14660
CAPACITY HEATING@47°F (RATED)	Btu	13,600
CAPACITY HEATING@17°F (RATED)	Btu	8,800
CAPACITY HEATING (MIN-MAX)	Btu	3070~20470
COOLING AMPS		3.8
HEATING AMPS		4.3
SENSIBLE HEAT RATIO		.70
SEER		25.0
EER		14.1
HSPF		11.0
ENERGY STAR		Yes (Most Efficient)
MOISTURE REMOVAL	Pts/h	1.7
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	177 / 283 / 417 / 494
SOUND RATING - INDOOR	dB-A	17 / 25 / 36 / 42
SOUND RATING - OUTDOOR	dB-A	51
OPERATING RANGE (COOLING)	°F	14~118
OPERATING RANGE (HEATING)	°F	14~75
EST. YEARLY OPERATING COST	\$	77
ELECTRICAL DATA		
POWER SOURCE	V	208/230/60/1
MINIMUM AMPACITY	A	10
COOLING WATTS	W	857
HEATING WATTS	W	960
MAX. TD FUSE/BREAKER	A	15
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14
REFRIGERATION SYSTEM		
REFRIGERANT		R410A
COMPRESSOR TYPE		Twin Rotary
CONNECTIONS		Flare
LIQUID LINE O.D.	in	1/4
SUCTION LINE O.D.	in	3/8
FACTORY PRECHARGE	ft	25
REFRIGERANT CHARGE	oz	44
MIN./MAX. LINE LENGTH	ft	10~49
MAX. HEIGHT DIFFERENCE	ft	23
DIMENSIONS & WEIGHT		
INDOOR UNIT		
W X H X D	in	34-7/16 x 11-5/8 x 9-1/4
NET WEIGHT	lbs	25
SHIPPING WEIGHT	lbs	29
OUTDOOR UNIT		
W X H X D	in	34-5/16 x 25-7/8 x 12-5/8
NET WEIGHT	lbs	95
SHIPPING WEIGHT	lbs	100
TOTAL NET WEIGHT	lbs	119
TOTAL SHIPPING WEIGHT	lbs	128

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Single Zone WALL-MOUNTED

9000-18000 Btu. Features for comfort and convenience year 'round. In heating mode, units use approximately 1/4 of the energy required by electric heat.

Features

- Inverter technology (variable speed compressor)
- BLDC motors
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan mode
- Surge Cool/Heat
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Auto changeover
- Built-in low ambient standard, down to 14°F (Cooling Mode), down to 0°F with wind baffle
- 24-hour on/off timer



MW09Y3J, MW12Y3J



MW18Y3J



WIRELESS
REMOTE CONTROL



MR09Y3J, MR12Y3J



MR18Y3J


DIAMONGOLD
Advanced Corrosion Protection™



**PRECISION
INVERTER**™

SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Heat Pump		
		9k	12k	18k
SYSTEM MODEL NO.		M09YJ	M12YJ	M18YJ
INDOOR MODEL		MW09Y3J	MW12Y3J	MW18Y3J
OUTDOOR MODEL		MR09Y3J	MR12Y3J	MR18Y3J
SPECIFICATIONS				
CAPACITY COOLING (RATED)	Btu	9,000	11,200	17,000
CAPACITY COOLING (MIN-MAX)	Btu	3,070~12,620	3,070~14,660	3,070~20,470
CAPACITY HEATING @47° F (RATED)	Btu	10,800	13,300	20,200
CAPACITY HEATING @17° F	Btu	6,600	8,700	13,200
CAPACITY HEATING (MIN-MAX)	Btu	3,070~17,060	3,070~20,470	3,070~30,700
COOLING AMPS		3	4.2	7
HEATING AMPS		3.7	4.9	7.3
SENSIBLE HEAT RATIO		.72	.73	.73
SEER		21.5	21.5	18.0
EER		13.3	12.5	12.0
HSPF		11.0	11.0	9.7
ENERGY STAR		YES	YES	YES
MOISTURE REMOVAL	Pts/h	2.3	3.0	4.2
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	124/212/272/335	124/212/272/335	300/371/441/512
SOUND RATING - INDOOR	dB-A	19 / 24 / 33 / 38	19 / 24 / 33 / 39	29 / 35 / 40 / 45
SOUND RATING - OUTDOOR	dB-A	45	45	53
OPERATING RANGE (COOLING)(WIND BAFFLE)	°FDB	14 (0)~118	14 (0)~118	14 (0)~118
OPERATING RANGE (HEATING)	°FWB	-4~75	-4~75	-4~75
EST. YEARLY OPERATING COST	\$	61	81	127
ELECTRICAL DATA				
POWER SOURCE	V	208/230/60/1	208/230/60/1	230/208/60/1
MINIMUM AMPACITY	A	10	10	19
COOLING WATTS	W	677	896	1416
HEATING WATTS	W	700	1000	1680
MAX. TD FUSE/BREAKER	A	15	15	20
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14	4 x 14
REFRIGERATION SYSTEM				
REFRIGERANT		R410A	R410A	R410A
COMPRESSOR TYPE		Single Rotary	Single Rotary	Twin Rotary
CONNECTIONS		Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8	1/2
FACTORY PRECHARGE	ft	41	41	25
REFRIGERANT CHARGE	oz	36	36	48
MIN./MAX. LINE LENGTH	ft	7~66	7~66	10~66
MAX. HEIGHT DIFFERENCE	ft	33	33	33
DIMENSIONS & WEIGHT				
INDOOR UNIT				
W X H X D	in	35-1/4 x 11-1/4 x 8-1/4	35-1/4 x 11-1/4 x 8-1/4	40-5/8 x 12-7/8 x 9-5/8
NET WEIGHT	lbs	23	23	31
SHIPPING WEIGHT	lbs	27	27	40
OUTDOOR UNIT				
W X H X D	in	30-5/16x21-5/16x11-5/16	30-5/16x21-5/16x11-5/16	34-5/16x25-7/8x12-5/8
NET WEIGHT	lbs	78	78	97
SHIPPING WEIGHT	lbs	79	79	101
TOTAL NET WEIGHT	lbs	101	101	128
TOTAL SHIPPING WEIGHT	lbs	106	106	141

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Single Zone WALL-MOUNTED

24000-36000 Btu. Features for comfort and convenience year 'round. In heating mode, units use approximately 1/4 of the energy required by electric heat.

Features

- Inverter technology (variable speed compressor)
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan mode
- Surge Cool/Heat
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Auto changeover
- Built-in low ambient standard, down to 14°F (Cooling Mode)
- 24-hour on/off timer



WIRELESS
REMOTE CONTROL



MR24Y3J, MR30Y3J, MR36Y3J



SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Wall-Mounted - Heat Pump		
		24k	30k	36k
SYSTEM MODEL NO.		M24YJ	M30YJ	M36YJ
INDOOR MODEL		MW24Y3J	MW30Y3J	MW36Y3J
OUTDOOR MODEL		MR24Y3J	MR30Y3J	MR36Y3J
SPECIFICATIONS				
CAPACITY COOLING (RATED)	Btu	22,000	30,000	33,000
CAPACITY COOLING (MIN-MAX)	Btu	3,070~30,030	3,070~34,000	3,070~34,000
CAPACITY HEATING @47° F (RATED)	Btu	27,000	32,000	35,200
CAPACITY HEATING @17° F (RATED)	Btu	17,900	21,200	23,200
CAPACITY HEATING (MIN-MAX)	Btu	3,070~38,898	3,070~38,900	3,070~38,900
COOLING AMPS		7.9	13.4	17.0
HEATING AMPS		10.7	13.9	16.2
SENSIBLE HEAT RATIO		.72	.78	.78
SEER		21.0	18.5	16.5
EER		12.5	10.0	8.2
HSPF		11.0	10.0	10.0
ENERGY STAR		YES	No	No
MOISTURE REMOVAL	Pts/h	5.5	6.0	6.5
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	300/389/512/600	459/530/706/848	459/530/706/848
SOUND RATING - INDOOR	dB-A	33 / 39 / 43 / 46	33 / 39 / 44 / 49	37 / 40 / 44 / 49
SOUND RATING - OUTDOOR	dB-A	54	55	55
OPERATING RANGE (COOLING)(WIND BAFFLE)	°F	14(0)~118	14(0)~118	14(0)~118
OPERATING RANGE (HEATING)	°F	-4~75	-4~75	-4~75
EST. YEARLY OPERATING COST	\$	158	270	395
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14	4 x 14
ELECTRICAL DATA				
POWER SOURCE	V	208/230/60/1	208/230/60/1	230/208/60/1
MINIMUM AMPACITY	A	19	19	19
COOLING WATTS	W	1760	3000	4024
MAX. TD FUSE/BREAKER	A	35	35	35
REFRIGERATION SYSTEM				
REFRIGERANT		R410A	R410A	R410A
COMPRESSOR TYPE		Twin Rotary	Twin Rotary	Twin Rotary
CONNECTIONS		Flare	Flare	Flare
LIQUID LINE O.D.	in	3/8	3/8	3/8
SUCTION LINE O.D.	in	5/8	5/8	5/8
FACTORY PRECHARGE	ft	25	25	25
REFRIGERANT CHARGE	oz	78	78	78
MIN./MAX. LINE LENGTH	ft	10~164	10~164	10~164
MAX. HEIGHT DIFFERENCE	ft	98	98	98
DIMENSIONS & WEIGHT				
INDOOR UNIT				
W X H X D	in	46-7/8 x 13-5/8 x 10-3/8	46-7/8 x 13-5/8 x 10-3/8	46-7/8 x 13-5/8 x 10-3/8
NET WEIGHT	lbs	40	40	40
SHIPPING WEIGHT	lbs	46	46	46
OUTDOOR UNIT				
W X H X D	in	34-5/16 x 31-1/2 x 12-5/8	34-5/16 x 31-1/2 x 12-5/8	34-5/16 x 31-1/2 x 12-5/8
NET WEIGHT	lbs	125	125	125
SHIPPING WEIGHT	lbs	132	132	132
TOTAL NET WEIGHT	lbs	165	165	165
TOTAL SHIPPING WEIGHT	lbs	178	178	178

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Single Zone CEILING CASSETTE

24000 and 36000 Btu. Indoor units are typically installed in a drop ceiling. The unit mounts flush to the ceiling for a clean look and efficient installation.

Features

- Inverter technology (variable speed compressor)
- Internal condensate pump with 27 1/2" lift* included
- Natural air flow
- 4-Way cooling
- Surge Cool/Heat
- Cooling/Heating/Fan mode
- Dry mode
- Sleep mode
- Built-in low ambient standard, down to 5°F (Cooling mode)
- Independent vane control
- 3 Fan speeds
- Evaporator frost control
- 24-hour on/off timer
- Auto restart
- Auto changeover
- Temperature display on remote
- Ultra-quiet turbo fan
- DiamonGold Advanced Corrosion Protection™
- Clean, modern look
- Flexible installation
- ENERGY STAR® qualified models
- Precise air distribution
- Capable of branch duct to adjacent closet or bathroom

* Lift from drain pan to the highest point 27 1/2"



WIRELESS
REMOTE CONTROL



MC24Y3J



MR24UY3J



Low profile indoor unit is recessed into the ceiling for a clean look and greater clearance.

NOTE: Grilles are sold separately.

See optional accessories on page 11.



MC36Y3J



MR36UY3J


DIAMONGOLD
Advanced Corrosion Protection™



**PRECISION
INVERTER**™

SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Cassette - Heat Pump	
		24k	36k
SYSTEM MODEL NO.		C24YJ	C36YJ
INDOOR MODEL		MC24Y3J	MC36Y3J
OUTDOOR MODEL		MR24UY3J	MR36UY3J
SPECIFICATIONS			
CAPACITY COOLING (RATED)	Btu	24,000	36,000
CAPACITY COOLING (MIN-MAX)	Btu	9,700~26,700	14,000~42,000
CAPACITY HEATING @47° F (RATED)	Btu	27,000	40,000
CAPACITY HEATING @17° F (RATED)	Btu	18,600	26,000
CAPACITY HEATING (MIN-MAX)	Btu	10,900~30,000	14,500~45,000
COOLING AMPS		15.1	20.2
HEATING AMPS		16.0	24.0
SENSIBLE HEAT RATIO		.77	.76
SEER		17.0	19.0
EER		12.6	13.5
HSPF		9.7	9.5
ENERGY STAR *		Yes	Yes
MOISTURE REMOVAL	Pts/h	5.1	7.7
AIRFLOW (LOW, MED, HIGH)	CFM	459 / 530 / 600	918 / 989 / 1,060
SOUND RATING - INDOOR H/M/L	dB(A)	38/36/34	46/44/43
SOUND RATING - OUTDOOR	dB(A)	62	67
OPERATING RANGE (COOLING)	°FDB	5~118	5~118
OPERATING RANGE (HEATING)	°FWB	-4~64	-4~64
EST. YEARLY OPERATING COST	\$	172	240
ELECTRICAL DATA			
POWER SOURCE	V	208/230/60/1	208/230/60/1
MINIMUM AMPACITY	A	18.1	24.5
COOLING WATTS	W	1910	2970
MAX. TD FUSE/BREAKER	A	30	40
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
COMPRESSOR TYPE		Twin Rotary	Twin Rotary
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	3/8	3/8
SUCTION LINE O.D.	in	5/8	5/8
FACTORY PRECHARGE	ft	25	25
REFRIGERANT CHARGE	oz	71	120
MIN./MAX. LINE LENGTH	ft	25~164	25~246
MAX. HEIGHT DIFFERENCE	ft	98	98
DIMENSIONS & WEIGHT			
INDOOR UNIT			
W X H X D	in	33-1/16 x 8-1/16 x 33-1/16	33-1/16 x 11-3/8 x 33-1/16
NET WEIGHT	lbs	45	54
SHIPPING WEIGHT	lbs	58	65
INDOOR UNIT GRILLE** W X H X D	in	37-3/8 x 15/16 x 37-3/8	37-3/8 x 15/16 x 37-3/8
INDOOR UNIT GRILLE** NET WEIGHT	lbs	11	11
OUTDOOR UNIT			
W X H X D	in	37-7/16 x 32-7/8 x 13	37-13/32 x 54-3/8 x 13
NET WEIGHT	lbs	132	203
SHIPPING WEIGHT	lbs	146	227
TOTAL NET WEIGHT	lbs	178	257
TOTAL SHIPPING WEIGHT	lbs	203	293

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

*System meets ENERGY STAR® published minimums.

**Models require grille. Sold separately.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Single Zone CONCEALED DUCT

24000 and 36000 Btu. Indoor unit is installed in the ceiling or furr down for unobtrusive installation.

Features

- Inverter technology (variable speed compressor)
- BLDC motor
- Internal condensate pump with 27 1/2" lift* included
- Cooling/Heating/Fan mode
- Dry mode
- 3 Fan speeds
- 24-hour on/off timer
- Auto restart
- Auto changeover
- Sleep mode
- Control lock function on controller
- External Static Pressure Range(ESP)
 - 24,000 (0.1 - 0.78) WC
 - 36,000 (0.15 - 0.6) WC

* Lift from drain pan to highest point 27 1/2"



MD24Y3J, MD36Y3J



WIRED WALL
CONTROLLER



MR24UY3J



MR36UY3J


DIAMONGOLD
Advanced Corrosion Protection™



**PRECISION
INVERTER**™

SPECIFICATIONS

PERFORMANCE RATINGS		Single Zone Concealed Ducted - Heat Pumps	
		24k	36k
SYSTEM MODEL NO.		D24YJ	D36YJ
INDOOR MODEL		MD24Y3J	MD36Y3J
OUTDOOR MODEL		MR24UY3J	MR36UY3J
SPECIFICATIONS			
CAPACITY COOLING (RATED)	Btu	24,000	36,000
CAPACITY COOLING (MIN-MAX)	Btu	9,700~26,700	16,000~41,400
CAPACITY HEATING @47°F (RATED)	Btu	27,000	40,000
CAPACITY HEATING @17°F (RATED)	Btu	17,600	24,600
CAPACITY HEATING (MIN-MAX)	Btu	10,900~30,000	17,500~48,000
COOLING AMPS		15.1	20.8
HEATING AMPS		15.1	21.4
SENSIBLE HEAT RATIO		.68	.67
SEER		17.0	17.6
EER		12.0	12.1
HSPF		10.0	9.2
ENERGY STAR		No	No
MOISTURE REMOVAL	Pts/h	7.0	10.6
AIRFLOW (LOW, MED, HIGH)	CFM	530 / 618 / 688	706 / 953 / 1,130
SOUND RATING - INDOOR H/M/L	dB(A)	38/36/35	39/38/37
SOUND RATING - OUTDOOR	dB(A)	62	67
OPERATING RANGE (COOLING)	°F	5~118	5~118
OPERATING RANGE (HEATING)	°F	-4~64	-4~64
EST. YEARLY OPERATING COST	\$	180	268
ELECTRICAL DATA			
POWER SOURCE		208/230/60/1	208/230/60/1
MINIMUM AMPACITY	A	18.1	24.5
COOLING WATTS	W	2000	2910
MAX. TD FUSE/BREAKER	A	30	40
POWER AND COMMUNICATION CABLE	No. x AWG	4 x 14	4 x 14
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
COMPRESSOR TYPE		Twin Rotary	Twin Rotary
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	3/8	3/8
SUCTION LINE O.D.	in	5/8	5/8
FACTORY PRECHARGE	ft	25	25
REFRIGERANT CHARGE	oz	71	120
MIN./MAX. LINE LENGTH	ft	25~164	25~246
MAX. HEIGHT DIFFERENCE	ft	98	98
DIMENSIONS & WEIGHT			
INDOOR UNIT			
W X H X D	in	46-9/16 x 11-3/4 x 17-3/4	48-1/2 x 15 x 23-1/4
NET WEIGHT	lbs	73	125
SHIPPING WEIGHT	lbs	95	139
OUTDOOR UNIT			
W X H X D	in	37-7/16 x 32-7/8 x 13	37-7/16 x 54-3/8 x 13
NET WEIGHT	lbs	132	203
SHIPPING WEIGHT	lbs	146	227
TOTAL NET WEIGHT	lbs	205	327
TOTAL SHIPPING WEIGHT	lbs	240	366

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Multizone WALL-MOUNTED

High efficiency heat pumps with features for comfort and convenience year 'round. In heating mode, units use approximately 1/4 of the energy required by electric heat.

Features

- Inverter technology (variable speed compressor)
- High efficiency for low operating cost
- DiamonGold Advanced Corrosion Protection™
- Auto Clean indoor coil
- Cooling/Heating/Fan mode
- Surge Cool/Heat
- Natural air flow
- 4-Way auto swing
- Ultra quiet operation
- Sleep mode
- Dry mode
- Auto restart
- Built-in low ambient standard, down to 14°F (Cooling Mode)
- 24-hour on/off timer
- Wall stand-off bracket



MW09Y3J, MW12Y3J



MW18Y3J



WIRELESS
REMOTE CONTROL



MR24DY3JM



MR36TQY3JM



SPECIFICATIONS

PERFORMANCE RATINGS		Multizone Wall-Mounted - Heat Pumps		
		9k	12k	18k
INDOOR MODEL		MW09Y3J	MW12Y3J	MW18Y3J
SPECIFICATIONS				
CAPACITY COOLING (RATED)	Btu	9,000	11,200	17,000
CAPACITY HEATING (RATED)	Btu	10,800	13,300	20,200
MOISTURE REMOVAL	Pts/h	2.3	2.7	4.2
AIRFLOW (QUIET, LOW, MED, HIGH)	CFM	124/212/272/335	124/212/272/335	300/399/509/622
SOUND RATING - INDOOR	dB-A	19 / 24 / 33 / 38	19 / 24 / 33 / 39	29 / 35 / 40 / 45
ELECTRICAL DATA				
POWER SOURCE	V, Ø, Hz	230/208-60-1	230/208-60-1	230/208-60-1
REFRIGERATION SYSTEM				
CONNECTIONS		Flare	Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8	1/2
DIMENSIONS & WEIGHT				
W X H X D	in	35-1/4 x 11-1/4 x 8-1/4	35-1/4 x 11-1/4 x 8-1/4	40-5/8 x 12-7/8 x 9-5/8
NET WEIGHT	lbs	23	23	31
SHIPPING WEIGHT	lbs	27	27	40

PERFORMANCE RATINGS		Multi Outdoor	
		24k	36k
OUTDOOR MODEL		MR24DY3JM	MR36TQY3JM
SPECIFICATIONS			
POWER SOURCE		208/230/60/1	208/230/60/1
EST. YEARLY OPERATING COST	\$	122-125	170-245
RUNNING CURRENT COOLING MIN.-RATED-MAX.	A	2.8-6.6-14.0	3.3-11.8-17.0
RUNNING CURRENT HEATING MIN.-RATED-MAX.	A	3.0-10.2-14.1	4.9-15.5-17.8
POWER INPUT COOLING MIN.-RATED-MAX.	W	390-1430-3090	770-2720-3920
POWER INPUT HEATING MIN.-RATED-MAX.	W	420-2210-3100	1120-3580-4100
POWER AND COMMUNICATION CABLE	No. x AWG	4 X 14	4 X 14
DIMENSIONS W X H X D	inch	34-1/4 x 31-7/8 x 12-5/8	35-7/16 x 45-7/8 x 14-5/8
NET WEIGHT	lbs	130	209
SHIPPING WEIGHT	lbs	139	223
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
FACTORY PRECHARGE	ft	74	98
REFRIGERANT CHARGE	oz	74	124
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8
MIN./MAX. LINE LENGTH (EACH)	ft	10-82	10-82
MIN./MAX. LINE LENGTH (TOTAL)	ft	75-246	75-246
MAX. HEIGHT DIFFERENCE	ft	49	49
SOUND PRESSURE LEVEL COOLING	A	51	57
SOUND PRESSURE LEVEL HEATING	A	51	57
OPERATING RANGE COOLING MIN. ~ MAX.	°F DB	14 ~ 114	14 ~ 114
OPERATING RANGE HEATING MIN. ~ MAX.	°F WB	5 ~ 64	5 ~ 64
MINIMUM AMPACITY	A	15	17
MAX. TD FUSE/BREAKER	A	25	25

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Multizone CEILING CASSETTE

Indoor units are typically installed in a drop ceiling. The grille fits almost flush with the ceiling for a clean look and efficient installation.

Features

- Inverter technology (variable speed compressor)
- Internal condensate pump with 23" lift* included
- Natural air flow
- 4-Way cooling
- Cooling/Heating/Fan mode
- Dry mode
- Night Quiet Operation
- Built-in low ambient standard, down to 14°F (Cooling mode)
- 3 Fan speeds
- Evaporator frost control
- 24-hour on/off timer
- Auto restart
- Temperature display on remote
- Ultra-quiet turbo fan
- DiamonGold Advanced Corrosion Protection™
- Clean, modern look
- Flexible installation
- ENERGY STAR® qualified models
- Precise air distribution
- Capable of branch duct to adjacent closet or bathroom

* Lift from drain pan to highest point 23"



WIRELESS
REMOTE CONTROL



NOTE: Grilles are sold separately.

See optional accessories on page 11.



MC12Y3JM, MC18Y3JM



MR24DY3JM



MR36TQY3JM

SPECIFICATIONS

PERFORMANCE RATINGS		Multizone Cassette - Heat Pumps	
INDOOR MODEL		MC12Y3JM	MC18Y3JM
SPECIFICATIONS			
CAPACITY COOLING (RATED)	Btu	12,000	18,000
CAPACITY HEATING (RATED)	Btu	13,800	19,000
MOISTURE REMOVAL	Pts/h	4.2	4.2
AIRFLOW (LOW, MED, HIGH)	CFM	247 / 283 /335	388 / 424 / 459
SOUND RATING - INDOOR	dB-A	32/35/38	34/37/38
ELECTRICAL DATA			
POWER SOURCE	V, Ø, Hz	208/230, 1, 60	208/230, 1, 60
POWER AND COMMUNICATION CABLE	No. x AWG	4C x 14	4C x 14
REFRIGERATION SYSTEM			
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	1/2
DIMENSIONS & WEIGHT			
W X H X D	in	22-7/16 x 8-7/16 x 22-7/16	22-7/16 x 10-3/32 x 22-7/16
NET WEIGHT	lbs	31	33
SHIPPING WEIGHT	lbs	36	42
INDOOR UNIT GRILLE* W X H X D	in	27-9/16 x 7/8 x 27-9/16	27-9/16 x 7/8 x 27-9/16
INDOOR UNIT GRILLE* NET WEIGHT	lbs	7	7

PERFORMANCE RATINGS		Multi Outdoor	
		24k	36k
OUTDOOR MODEL		MR24DY3JM	MR36TQY3JM
SPECIFICATIONS			
POWER SOURCE		208/230/60/1	208/230/60/1
EST. YEARLY OPERATING COST	\$	122-125	170-245
RUNNING CURRENT COOLING MIN.-RATED-MAX.	A	2.8~6.6~14.0	3.3~11.8~17.0
RUNNING CURRENT HEATING MIN.-RATED-MAX.	A	3.0~10.2~14.1	4.9~15.5~17.8
POWER INPUT COOLING MIN.-RATED-MAX.	W	390~1430~3090	770~2720~3920
POWER INPUT HEATING MIN.-RATED-MAX.	W	420~2210~3100	1120~3580~4100
POWER AND COMMUNICATION CABLE	No. x AWG	4 X 14	4 X 14
DIMENSIONS W X H X D	inch	34-1/4 x 31-7/8 x 12-5/8	35-7/16 x 45-7/8 x 14-5/8
NET WEIGHT	lbs	130	209
SHIPPING WEIGHT	lbs	139	223
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
FACTORY PRECHARGE	ft	74	98
REFRIGERANT CHARGE	oz	74	124
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8
MIN./MAX. LINE LENGTH (EACH)	ft	10~82	10~82
MIN./MAX. LINE LENGTH (TOTAL)	ft	75~246	75~246
MAX. HEIGHT DIFFERENCE	ft	49	49
SOUND PRESSURE LEVEL COOLING	A	51	57
SOUND PRESSURE LEVEL HEATING	A	51	57
OPERATING RANGE COOLING MIN. ~ MAX.	°F DB	14 ~ 114	14 ~ 114
OPERATING RANGE HEATING MIN. ~ MAX.	°F WB	5 ~ 64	5 ~ 64
MINIMUM AMPACITY	A	15	17
MAX. TD FUSE/BREAKER	A	25	25

*Models require grille. Grille sold separately.

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



HEAT PUMPS

Multizone CONCEALED DUCT

Indoor unit is installed in the ceiling or furr down for unobtrusive installation. Conditioned or non-conditioned air can be added to ducting to allow fresh air into the conditioned space whenever required.

Features

- Inverter technology (variable speed compressor)
- Internal condensate pump with 23" lift* included
- Cooling/Heating/Fan mode
- Dry mode
- 3 Fan speeds
- 24-hour on/off timer
- Auto restart
- Sleep mode
- Control lock function
- External Static Pressure Range (ESP)
 - 12,000 (0.0 - 0.16) WC
 - 18,000 (0.0 - 0.16) WC

* Lift from drain pan to the highest point. Use external drain pump for installations requiring condensate lift exceeding 23"



MD12Y3JM, MD18Y3JM



WIRED WALL
CONTROLLER



MR24DY3JM



MR36TQY3JM

SPECIFICATIONS

PERFORMANCE RATINGS		Multizone Concealed Ducted - Heat Pumps	
INDOOR MODEL		MD12Y3JM	MD18Y3JM
SPECIFICATIONS			
CAPACITY COOLING (RATED)	Btu	12,000	18,000
CAPACITY HEATING (RATED)	Btu	13,800	19,000
MOISTURE REMOVAL	Pts/h	2.5	4.2
AIRFLOW (LOW, MED, HIGH)	CFM	265 / 300 / 335	406 / 477 / 530
SOUND RATING - INDOOR	dB-A	26/31/33	29/31/34
ELECTRICAL DATA			
POWER SOURCE		208/230, 1, 60	208/230, 1, 60
POWER AND COMMUNICATION CABLE	No. x AWG	4C x 14	4C x 14
REFRIGERATION SYSTEM			
CONNECTIONS		Flare	Flare
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	1/2
DIMENSIONS & WEIGHT			
W X H X D	in	32-9/32 x 7-15/32 x 22-5/8	43-5/16 x 7-15/32 x 22-5/8
NET WEIGHT	lbs	45	58
SHIPPING WEIGHT	lbs	51	65

PERFORMANCE RATINGS		Multi Outdoor	
		24k	36k
OUTDOOR MODEL		MR24DY3JM	MR36TQY3JM
SPECIFICATIONS			
POWER SOURCE		208/230/60/1	208/230/60/1
EST. YEARLY OPERATING COST	\$	122-125	170-245
RUNNING CURRENT COOLING MIN.-RATED-MAX.	A	2.8~6.6~14.0	3.3~11.8~17.0
RUNNING CURRENT HEATING MIN.-RATED-MAX.	A	3.0~10.2~14.1	4.9~15.5~17.8
POWER INPUT COOLING MIN.-RATED-MAX.	W	390~1430~3090	770~2720~3920
POWER INPUT HEATING MIN.-RATED-MAX.	W	420~2210~3100	1120~3580~4100
POWER AND COMMUNICATION CABLE	No. x AWG	4 X 14	4 X 14
DIMENSIONS W X H X D	inch	34-1/4 x 31-7/8 x 12-5/8	35-7/16 x 45-7/8 x 14-5/8
NET WEIGHT	lbs	130	209
SHIPPING WEIGHT	lbs	139	223
REFRIGERATION SYSTEM			
REFRIGERANT		R410A	R410A
FACTORY PRECHARGE	ft	74	98
REFRIGERANT CHARGE	oz	74	124
LIQUID LINE O.D.	in	1/4	1/4
SUCTION LINE O.D.	in	3/8	3/8
MAX. LINE LENGTH	ft	246	246
MAX. HEIGHT DIFFERENCE	ft	49	49
SOUND PRESSURE LEVEL COOLING	A	51	57
SOUND PRESSURE LEVEL HEATING	A	51	57
OPERATING RANGE COOLING MIN. ~ MAX.	°F DB	14 ~ 114	14 ~ 114
OPERATINGRANGE HEATING MIN. ~ MAX.	°F WB	5 ~ 64	5 ~ 64
MINIMUM AMPACITY	A	15.4	16.8
MAX. TD FUSE/BREAKER	A	25	25

Your operating costs will depend on your utility rates and use. The estimated operating cost is based on a electricity cost of \$.12 per kWh. For more information, visit www.ftc.gov/energy.

Due to continuing research in new energy-saving technology, specifications are subject to change without notice.



Wired and wireless controllers

Wired controllers

Wall control thermostats have an infrared sensor that allows the settings to be changed by using the wireless remote control.



WIRED REMOTE

Concealed Ducted
D24YJ, D36YJ
MD12Y3JM, MD18Y3JM



OPTIONAL WIRED REMOTE

DWC1- Works with all Friedrich ductless models

PROGRAMMABLE SETTINGS

- Simple program (1 to 7 hour) ON/OFF
- ON/OFF at set time
- Sleep program
- 7 Day schedule
- Holiday schedule



WIRELESS REMOTE

Cassette and
All Wall-mounted Models

Wireless diagnostic tool for Friedrich Precision Inverter Ductless Split Systems

Monitor and diagnose wall-mounted ductless systems* for quick service responses

3 EASY STEPS:

1. Download Friedrich Diagnostic App from Google Play or App Store
2. Connect DWTST module to outdoor unit
3. Begin monitoring unit



Technicians can observe various data points, such as:

- Thermistor temps
- DC link voltage
- Fan RPM
- EEV pulse
- Error codes



DWTST

IMPORTANT

*Friedrich DWTST works only with Friedrich Precision Inverter™ wall-mounted ductless split systems. Applications are subject to change without notice. Not for use with other Friedrich models or other brands of products.

174 Multizone combinations

MIX AND MATCH

Wall-mounted, concealed duct and ceiling cassette models.

Enjoy the flexibility to mix and match systems to fit your application.


Control the temperature in individual rooms for optimum comfort and energy savings.







*Multizone units cannot heat and cool simultaneously.









MULTIZONE SYSTEMS CAPACITIES AND RATINGS




Friedrich Model Number	AHRI Reference Number	IndoorType	System Capacity	EER	SEER	High Heat 47°F	HSPF	Low Heat 17°F
	7012702	Mixed Ducted and Non-ducted Indoor Units ■ ■ ■	18600	12.60	19.05	26300	8.95	16300
	7012703	Ducted Indoor Units ■	18000	11.80	16.40	26200	8.50	16400
	7012704	Non-Ducted Indoor Units ■ ■	19200	13.40	21.70	26400	9.40	16200

	7012710	Non-Ducted Indoor Units ■ ■	34000	12.50	17.50	41000	10.50	26000
	7012711	Ducted Indoor Units ■	34000	12.00	16.50	41000	9.50	27400
	7012712	Mixed Ducted and Non-ducted Indoor Units ■ ■ ■	34000	12.25	17.00	41000	10.00	26700

MR24DY3JM Combinations										
Indoor Unit Combinations										
	Wall-Mounted			Ducted		Cassette				
	9K	12K	18K	12K	18K	12K	18K			
2	2									
	1	1								
	1		1							
	1			1						
	1				1					
	1					1				
	1						1			
	1							1		
	1								1	
	2									
	1	1								
	1			1						
	1				1					
	1					1				
	3	3								
2		1								
2				1						
2						1				
1		2								
1				2						
1						2				
1		1		1						
1				1						
1						1				
1		1								

MR36TQY3JM Combinations										
Indoor Unit Combinations										
	Wall-Mounted			Ducted		Cassette				
	9K	12K	18K	12K	18K	12K	18K			
2	2									
	1	1								
	1			1						
	1				1					
	1					1				
	1						1			
	1							1		
	1								1	
	2									
	1	1								
	1			1						
	1				1					
	1					1				
	1						1			
	1							1		
	1								1	
	1									1
	2									
	1						1			
	1							1		
	1								1	
	1									1

MR36TQY3JM Combinations								
3 Indoor Unit Combinations								
	Wall-Mounted			Ducted		Cassette		
	9K	12K	18K	12K	18K	12K	18K	
	3							
	2	1						
	2		1					
	2			1				
	2				1			
	2					1		
	2						1	
	1	2						
	1	1	1					
	1	1		1				
	1	1			1			
	1	1				1		
	1	1					1	
	1		2					
	1		1	1				
	1		1		1			
	1		1			1		
	1		1				1	
	1			2				
	1			1	1			
	1				2			
	1				1	1		
	1					2		
	1					1	1	
	1						2	
			1					2
		1			2			
		3						
		2	1					
		2		1				
		2			1			
		2				1		
		2					1	
		1	2					
		1	1	1				
	1			1				1
	1			1		1		
	1				2			
				1	1			1
					1			1
				1		2		
	1				1			1
				1	1			1
					1	2		
				1		1	1	
				1		1	1	
					1	1	1	
				1				1
					1			1
					1	1		1
					1			2
						2	1	
							1	
								1
								2
								2
								1
								2
								3
								4
								3
								2
								4

MR36TQY3JM Combinations								
3 Indoor Unit Combinations								
	Wall-Mounted			Ducted		Cassette		
	9K	12K	18K	12K	18K	12K	18K	
					1	1	1	
					1	1		1
					1		1	1
						3		
					2	1		
					2		1	
					2			1
					1	2		
					1			2
						2	1	
						1	2	
							3	
							2	1
				1		1		1
				1			2	
					1		1	1
						1	2	
					1	2		
							1	2
							1	2
								1
								1
								2
								2
								3
								3
								1
								1
								2
								2
								1
								1
								2
								2
								1
								1
								3
								3
								4
								2
								2
								1
								2
								3
								1
								4
								1
								3
								2
								4

MR36TQY3JM Combinations								
4 Indoor Unit Combinations								
	Wall-Mounted			Ducted		Cassette		
	9K	12K	18K	12K	18K	12K	18K	
	4							
	3	1						
	3		1					
	3			1				
	3				1			
	3					1		
	3						1	
	3							1
	2	2						
	2				2			
	2						2	
	2	1			1			
	2	1					1	
	1	3						
	1				3			
	1						3	
	1	1			2			
	1	1					2	
	2				1		1	
	2				1			1
	2					1	1	
	2	1			1		1	
	2	1	1					
	2	1						1
	2		1	1				
	2		1				1	
	1	2			1			
	1	2					1	
		3			1			
		3					1	
		4						
		2			2			
		2			1		1	
		2					2	
		1					3	
		1			3			
					4			
					1		3	
					2		2	
							4	

NOMENCLATURE

1	M	2	RH	3	36	4	D	5	Y	6	3	7	J	8	M
1	Series	2	Model Type	3	Capacity	4	Application	5	Refrigeration Cycle	6	Voltage	7	Marketing Model	8	Installation Type
	Mini-split		W= Wall-mounted C= Cassette D= Concealed Ducted R= Outdoor component WH= Wall-mounted High SEER RH= Outdoor high SEER		9 = 9,000 BTU/h 12 = 12,000 BTU/h 18 = 18,000 BTU/h 24 = 24,000 BTU/h 30 = 30,000 BTU/h 36 = 36,000 BTU/h		Empty = Single D = Dual Zone T = Tri-Zone Q = Quad Zone U = Universal		C = Cool Only Y = Heat Pump		1 = 115V/60hz/1 3 = 230V/60hz/1		(Internal Use)		M = Multi Zone

REFRIGERATION LINE SETS MINIMUM/MAXIMUM LENGTHS

Single Zone				
System Model	Outdoor	Indoor	Min. (ft.)	Max. (ft.)
M09YJ	MR09Y3J	MW09Y3J	7	66
M12YJ	MR12Y3J	MW12Y3J	7	66
M18YJ	MR18Y3J	MW18Y3J	10	66
M09CJ	MR09C1J	MW09C1J	7	66
M12CJ	MR12C1J	MW12C1J	7	66
M18CJ	MR18C3J	MW18C3J	10	66
M24CJ	MR24C3J	MW24C3J	10	98
M24YJ	MR24Y3J	MW24Y3J	10	164
M30YJ	MR30Y3J	MW30Y3J	10	164
M36YJ	MR36Y3J	MW36Y3J	10	164
HM12YJ	MHR12Y3J	MHW12Y3J	10	49
C24YJ	MR24UY3J	MC24Y3J	25	164
C36YJ	MR36UY3J	MC36Y3J	25	246
D24YJ	MR24UY3J	MD24Y3J	25	164
D36YJ	MR36UY3J	MD36Y3J	25	246

TORQUE WRENCH SETTINGS

Multizone Outdoor		Individual Zone Line Lengths		Combined System Line Lengths	
		Min. (ft.)	Max. (ft.)	Min. (ft.)	Max. (ft.)
MR24DY3JM	Dual Zone	10*	82	25	246
MR24DY3JM	Tri Zone	10*	82	75	246
MR36TQY3JM	Dual Zone	10*	82	25	246
MR36TQY3JM	Tri or Quad Zone	10*	82	75	246

Outside Diameter		Torque	
mm	inch	ft-lbs.	N-m
Ø6.35	1/4	13~18	17.6~24.5
Ø9.52	3/8	25~30	33.3~41.2
Ø12.7	1/2	40~47	53.9~64.7
Ø15.88	5/8	45~59	61.7~80.4

*The combined line lengths of the individual zones must equal the minimum line length for the selected multizone system.
 For a Dual Zone System: The combined lengths must equal at least 25 feet.
 For a Tri Zone or Quad Zone System: The combined lengths must equal at least 75 ft.



Friedrich Air Conditioning Company
10001 Reunion Place, Suite 500
San Antonio, TX 78216
800.541.6645
www.friedrich.com

DUCTLESS SPLIT SYSTEMS LIMITED WARRANTY

1. **A) FIVE YEAR WARRANTY - FRIEDRICH AIR CONDITIONING CO. (FRIEDRICH)** warrants to the original end-user of this product that should it prove defective due to improper workmanship and/or material under normal use for a period of five years from the date of installation, FRIEDRICH will repair or replace, at its option, any defective part without charge for the part. Replacement parts are warranted for the remainder of the original warranty period.

B) THIS WARRANTY DOES NOT INCLUDE LABOR or other cost incurred for servicing, repairing, removing, installing, shipping, or handling of either defective or replacement parts, or complete unit. Such cost may be covered by a separate warranty provided by the installing contractor.

C) SEVEN YEAR COMPRESSOR WARRANTY- During the seven year warranty period from the date of installation, should the compressor prove defective due to improper workmanship and/or material, **FRIEDRICH** will furnish a replacement compressor, at no charge, which is warranted for the remainder of the original warranty period. **LABOR IS NOT INCLUDED FOR INSTALLING REPLACEMENT COMPRESSOR.**

These warranties apply only while the unit remains at the original site and only to units installed inside the continental United States, Alaska, Hawaii, Puerto Rico, Mexico and Canada. The warranty applies only if the unit is installed and operated in accordance with the printed instructions and in compliance with applicable local installation and building codes and good trade practices. For international warranty information, contact the Friedrich Air Conditioning Company - International Division.

D) NOTICE: To obtain service and/or warranty parts replacement, you must notify an authorized FRIEDRICH Air Conditioning Co. distributor, dealer, or contractor of any defect within the applicable warranty period.

2. Any defective part to be replaced must be made available to **FRIEDRICH** in exchange for the replacement part. You must present proof of the original date of installation of the product in order to establish the effective date of the warranty. Otherwise, the effective date will be deemed to be the date of manufacture plus thirty days. The return of the owner registration card is not a condition of warranty coverage. However, please detach and return it so that we can contact you should a question of safety arise which could affect you.

3. **TO OBTAIN WARRANTY SERVICE**, please contact your authorized **FRIEDRICH** distributor, dealer, or the contractor who installed the equipment. If your dealer or contractor needs assistance, the authorized **FRIEDRICH** distributor is available for consultation, and **FRIEDRICH** supports the efforts of the distributor.

4. This limited warranty applies only to units remaining at the site of the original installation (except for mobile home installations) and only to units installed within the continental United States, Alaska, Hawaii, and Canada. This limited warranty applies only if the unit is installed and operated in accordance with FRIEDRICH instructions and in compliance with applicable local installation and building codes and good trade practices.

5. **THIS WARRANTY DOES NOT COVER** damages caused by: (a) accident, abuse, negligence, or misuse; (b) operating the product in a corrosive atmosphere containing chlorine, fluorine or any other damaging chemicals; (c) modification, alteration, poor service practices; (d) improper matching or application of the product or components; (e) failure to provide proper maintenance and service to the product according to manufacture's instructions; (f) installation or operating of the product in a manner contrary to the instructions of the manufacturer; (g) lightning, fluctuations in electrical power or other Acts of God. This **LIMITED WARRANTY** also excludes all cost of installation, disconnection or dismantling the product, parts used in connection with normal maintenance such as air filters or belts and owner-required maintenance. Consult the instructions enclosed with the product for information regarding recommended maintenance.

6. No one is authorized to change this **LIMITED WARRANTY** in any respect, or to create any other obligation or liability in connection with this product.

7. **YOUR ONLY REMEDIES ARE PROVIDED IN THIS LIMITED WARRANTY. ANY EXPRESS WARRANTY NOT PROVIDED HEREIN, AND ANY REMEDY WHICH, BUT FOR THIS PROVISION, MIGHT ARISE BY IMPLICATION OR OPERATION OF LAW, IS HEREBY EXCLUDED AND DISCLAIMED. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR ANY PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO A TERM OF ONE YEAR FROM THE DATE OF ORIGINAL INSTALLATION. UNDER NO CIRCUMSTANCES SHALL FRIEDRICH BE LIABLE TO THE OWNER OR ANY OTHER PERSON FOR ANY INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THIS PRODUCT, WHETHER ARISING OUT OF BREACH OF WARRANTY, BREACH OF CONTRACT OR OTHERWISE.**

8. Some states do not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental, special or consequential damages, so the above limitations or exclusions may not apply to you.

9. This warranty gives you specific legal rights, and you may have other rights which vary from state to state and province to province.

The Next Generation of Ductless Split Systems



Friedrich Air Conditioning Co. | 10001 Reunion Place, Suite 500 | San Antonio, TX 78216 | 877.599.5665 | www.friedrich.com